



## LSP型

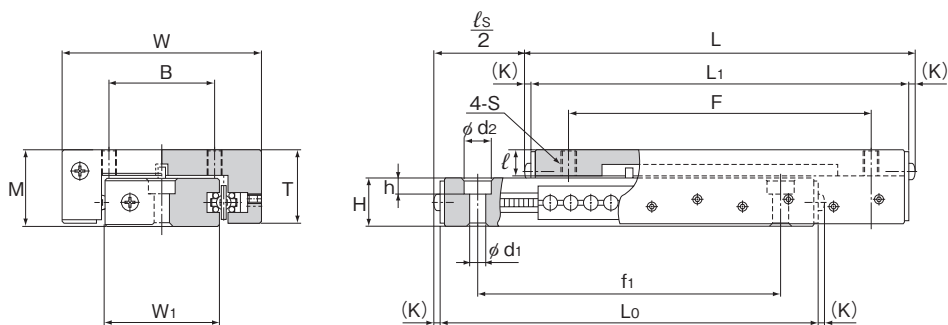

| 公称型号      | 滑座尺寸     |                 |                 |       |      |       |     |    |     |                 |
|-----------|----------|-----------------|-----------------|-------|------|-------|-----|----|-----|-----------------|
|           | 最大行程     | 高度              | 宽度              | 长度    |      |       |     |    |     |                 |
|           | $\ell_s$ | M<br>$\pm 0.25$ | W<br>$\pm 0.25$ | L     | T    | $L_1$ | (K) | B  | F   | $S \times \ell$ |
| LSP 1340  | 15       | 13              | 25              | 42    | 12.5 | 40    | 1   | 11 | 30  | M3×5            |
| LSP 1365  | 25       | 13              | 25              | 67    | 12.5 | 65    | 1   | 11 | 55  | M3×5            |
| LSP 1390  | 50       | 13              | 25              | 92    | 12.5 | 90    | 1   | 11 | 80  | M3×5            |
| LSP 2050  | 25       | 20              | 44              | 53    | 18.3 | 50    | 1.5 | 20 | 35  | M5×8.2          |
| LSP 2080  | 50       | 20              | 44              | 83    | 18.3 | 80    | 1.5 | 20 | 65  | M5×8.2          |
| LSP 20100 | 75       | 20              | 44              | 103   | 18.3 | 100   | 1.5 | 20 | 85  | M5×8.2          |
| LSP 25100 | 50       | 25              | 66              | 103.8 | 24   | 100   | 1.9 | 35 | 75  | M5×8.5          |
| LSP 25125 | 75       | 25              | 66              | 128.8 | 24   | 125   | 1.9 | 35 | 100 | M5×8.5          |
| LSP 25150 | 100      | 25              | 66              | 153.8 | 24   | 150   | 1.9 | 35 | 125 | M5×8.5          |

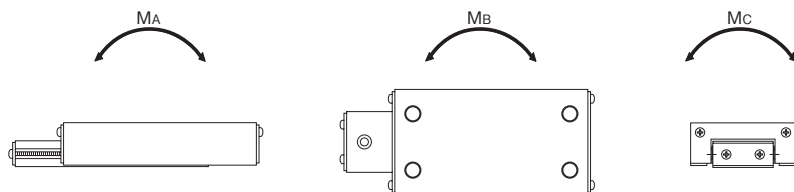

单位：mm

|      | 基座尺寸                 |               |                                     |                      |                | 静态容许力矩 <sup>注)</sup>                   |                       | 基本额定载荷 |                     | 质量<br>g |
|------|----------------------|---------------|-------------------------------------|----------------------|----------------|--|-----------------------|--------|---------------------|---------|
|      | 宽度<br>W <sub>i</sub> | 高度<br>H       | d <sub>1</sub> × d <sub>2</sub> × h | 长度<br>L <sub>0</sub> | f <sub>1</sub> | M <sub>A</sub> , M <sub>B</sub><br>N·m | M <sub>C</sub><br>N·m | C<br>N | C <sub>D</sub><br>N |         |
|      | 12.2                 | 7.7           | 3.3 × 6 × 3.3                       | 40                   | 30             | 0.88                                   | 0.49                  | 68.6   | 118                 |         |
| 12.2 | 7.7                  | 3.3 × 6 × 3.3 | 65                                  | 55                   | 1.76           | 0.98                                   | 118                   | 206    | 60                  |         |
| 12.2 | 7.7                  | 3.3 × 6 × 3.3 | 90                                  | 80                   | 3.04           | 1.27                                   | 157                   | 275    | 85                  |         |
| 22.3 | 11                   | 5.3 × 9 × 5.3 | 50                                  | 35                   | 1.37           | 2.25                                   | 157                   | 284    | 114                 |         |
| 22.3 | 11                   | 5.3 × 9 × 5.3 | 80                                  | 65                   | 3.53           | 4.51                                   | 304                   | 559    | 184                 |         |
| 22.3 | 11                   | 5.3 × 9 × 5.3 | 100                                 | 85                   | 5              | 5.69                                   | 392                   | 706    | 231                 |         |
| 38   | 15.8                 | 5.3 × 9 × 5.3 | 100                                 | 75                   | 9.22           | 14.5                                   | 588                   | 1069   | 433                 |         |
| 38   | 15.8                 | 5.3 × 9 × 5.3 | 125                                 | 100                  | 12.9           | 18.1                                   | 735                   | 1333   | 547                 |         |
| 38   | 15.8                 | 5.3 × 9 × 5.3 | 150                                 | 125                  | 17.5           | 21.9                                   | 882                   | 1598   | 652                 |         |

注) 上表中的M<sub>A</sub>、M<sub>B</sub>和M<sub>C</sub>分别表示1个滑座时的容许力矩值。